


BILDTAFEL

4

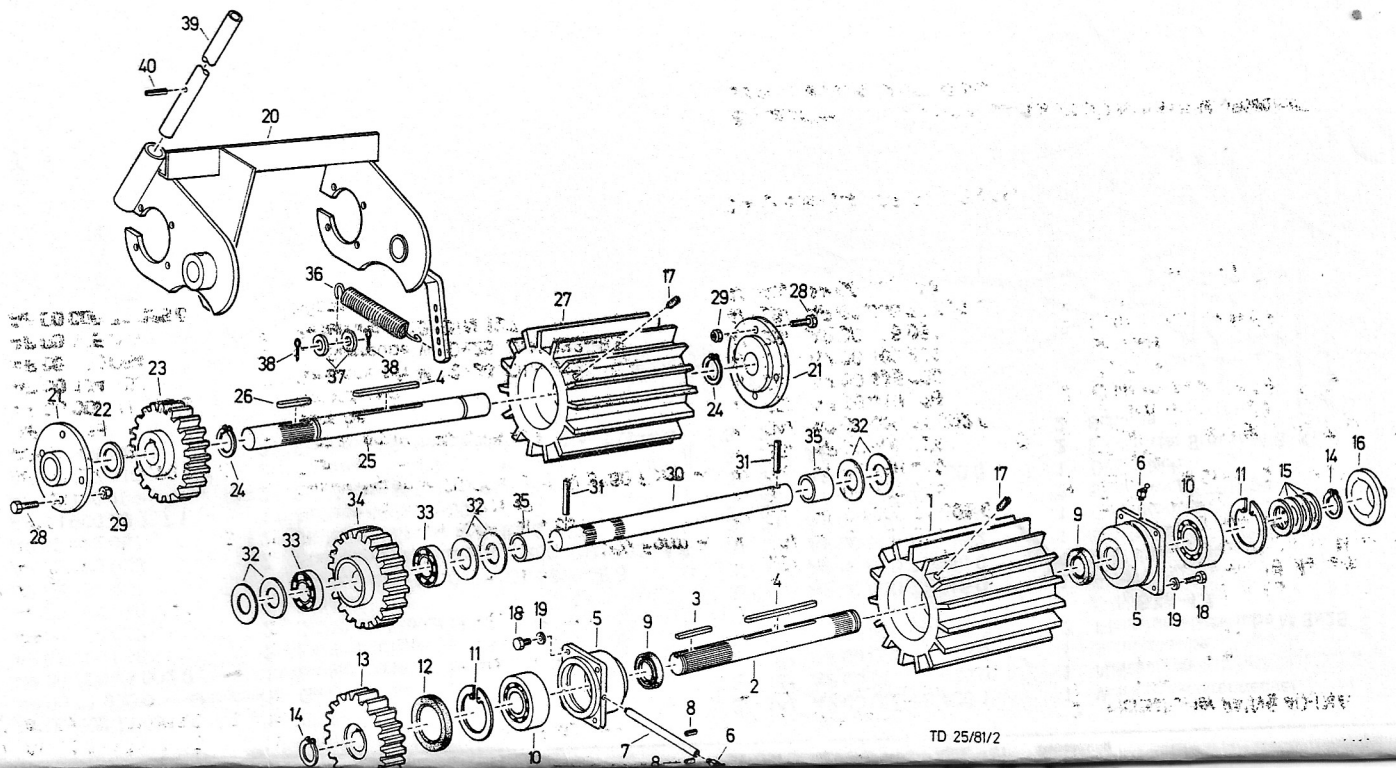

TD 25/81/2

4/ 1/ AP 00 000 71 067 0	1 Einzugswalze unten mit 15 Messern	4/ 21/ AP 00 406 103	2 Flanschhaiger PMNE 40-INA
4/ 2/ AP 00 000 71 066 0	1 Welle	4/ 22/ AP 00 162 516	1 Scheibe
4/ 3/ AP 00 150 537	1 Paßfeder AB 12x8x63 DIN 6885	4/ 23/ AP 00 000 71 096 0	1 Zahnrad Z = 20
4/ 4/ AP 00 150 684	2 Paßfeder A 12x8x140 DIN 6885	4/ 24/ AP 00 155 032	2 Sicherungsring 40 DIN 471
4/ 5/ AP 00 000 71 069 0	2 Lagerflansch	4/ 25/ AP 00 000 71 081 0	1 Welle
4/ 6/ AP 00 190 007	2 Schmiernippel BM 8x1 DIN 71412	4/ 26/ AP 00 150 137	1 Paßfeder A 12x8x63
4/ 7/ AP 00 000 71 074 0	1 Schmierrohr	4/ 27/ AP 00 000 71 067 0	1 Einzugswalze mit 15 Messern
4/ 8/ AP 00 172 136	2 Spannhülse 6x20 DIN 1481	4/ 28/ AP 00 100 066	8 SK-Schraube M 10x35 DIN 933-8.8
4/ 9/ AP 00 415 119	2 Wellendichtring 40/62x10 DIN 3760 Form A	4/ 29/ AP 00 122 057	8 SK-Mutter Stover M 10 Kl. 8
4/ 10/ AP 00 402 653	2 Pendelkugellager 2308 DIN 630	4/ 30/ AP 00 000 71 095 0	1 Zwischenwelle
4/ 11/ AP 00 155 154	2 Sicherungsring 90 DIN 472	4/ 31/ AP 00 172 174	2 Spannhülse 8x60 DIN 1481
4/ 12/ AP 00 415 201	1 Wellendichtring 70/90x10 DIN 3760 Form A	4/ 32/ AP 00 166 410	6 Scheibe
4/ 13/ AP 00 000 71 070 0	1 Zahnrad Z = 20	4/ 33/ AP 00 400 224	2 Rillenkugellager 6207-2 Z DIN 625
4/ 14/ AP 00 155 032	2 Sicherungsring 40 DIN 471	4/ 34/ AP 00 000 71 092 0	1 Zwischenrad Z = 20
4/ 15/ AP 00 166 411	4 Scheibe	4/ 35/ AP 00 410 036	2 Ölbrons-Büchse 35/45x35
4/ 16/ AP 00 000 71 073 0	1 Dichtdeckel	4/ 36/ AP 00 435 330	1 Zugfeder
4/ 17/ AP 00 174 156	2 Gewindestift M 12x20 DIN 913-10.9	4/ 37/ AP 00 162 801	2 Scheibe
4/ 18/ AP 00 100 064	8 SK-Schraube M 10x25 DIN 933-8.8	4/ 38/ AP 00 175 054	2 Splint 4x32 DIN 94
4/ 19/ AP 00 165 011	8 Federring A 10 DIN 127	4/ 39/ AP 00 000 71 101 0	1 Rohr
4/ 20/ AP 00 000 71 085 0	1 Wippe	4/ 40/ AP 00 172 144	1 Spannhülse 6x40 DIN 1481

C = Loctite 648 (AP 00 543 014)

Bei sämtlichen Arbeiten mit Loctite ist die Klebestelle unbedingt zu reinigen und zu entfetten.

Bei jeder Bestellung die vollständige Bestellnummer angeben, z.B. 4/ 1/ AP 00 000 71 067 0